


SUPRA 4.0^{PLUS}

TECHNICAL DATA SHEET · FLEBI SUPRA 4.0 PLUS

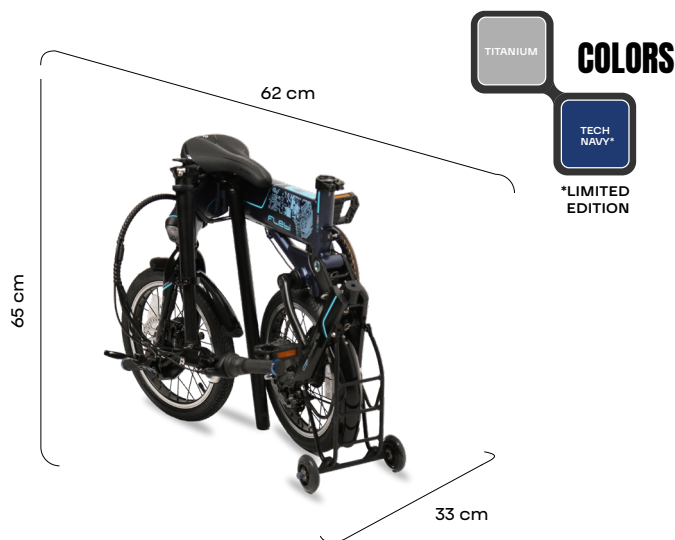

COMPONENTS

BATTERY	36V/14Ah / 504 W/h LiOn, USB, security lock
FRAME	Alloy, TIG welded, 16"x1.75, foldable, battery inside frame tube
ENGINE	Aikema AKM-13.0 Geared Brushless 36V/250W
FORK	1 1/8", slim alloy
CONTROL PANEL	Display M500U
ELECTRONIC CONTROL	Lishui 36v 6-15A
RIMS	16"x1.75" single wall, 28H, alloy silver
PEDAL SENSOR	Bigstone V12, 6 levels
CHARGER	ST Charger 42.0V 2.0A EU connector
TYRES	Schwalbe Big Apple 16 x 2.00"
FRONT BRAKE	Tektro MD-M280 mechanic disco
REAR BRAKE	Shimano Nexus Inter M rear roller brake
FRONT LIGHT	White light, battery powered
REAR LIGHT	Red light USB
CHAINWHEEL	52T 165mm
BRAKE LEVERS	Tektro EL-555 integrated bell and brake sensor
PEDALS	Wellgo F284, PP 9/16" foldable with reflector
GEARS	Shimano Nexus 7
HANDLES	TPR soft, black
REAR DERAILLEUR LEVERS	Twister shifter 7 speed
HANDLEBARS	22.2x560mm, low rise, silver, with alloy folding type stem
SADDLE	Velo VL-6309A
STEM	Optional
RACK	Yes, with rolling wheels
BELL	Yes
TRANSPORT BAG	Optional

SPECIFICATIONS

WEIGHT (KG)	16.8
DIMENSIONS (CM)	130x106x57
FOLDING TIME (S)	10
FOLDED DIMENSIONS (CM)	62x33x65
HANDLEBAR HEIGHT (CM)	106(max)
SADDLE HEIGHT (CM)	110(max)
MAX LOAD (KG)	110
MAX HEIGHT (M)	1.90
RANGE(KM)	60-70km
RECHARGING TIME (H)	5
VOLTAGE (V)	100-240 VAC
MAX SPEED (KM/H)	25
BATTERY LIFE (CYCLES)	800
MAXIMUM SLOPE (%)	15%
TYRE PRESSURE	3.1 bar 45 PSI
CERTIFICATION	CE, EN15194 – bicycles EPAC
PACKAGE DIMENSIONS (CM)	95x73x28cm