


SUPRA 4.0^{LITE}

TECHNICAL DATA SHEET- FLEBI SUPRA 4.0 LITE

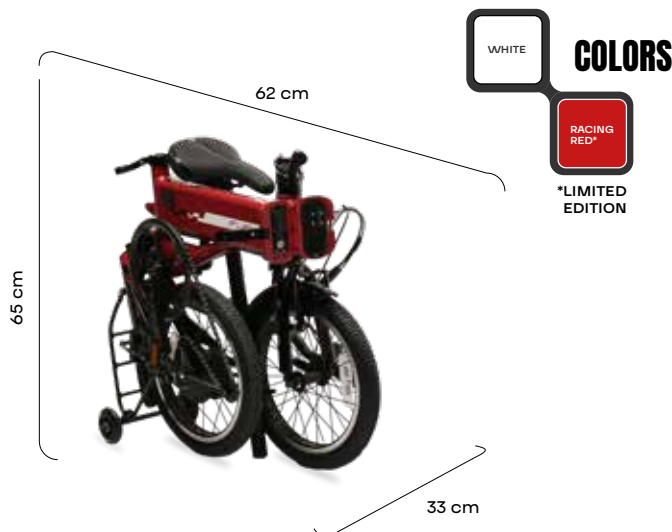

COMPONENTS

BATTERY	36V/7.8Ah / 280.8 W/h LiOn, USB
FRAME	Alloy, TIG welded, 16"x1.75, folded, removable battery
ENGINE	XF05H Geared Brushless 36V/250W
FORK	11/8", hiten, TIG welded
CONTROL PANEL	Display M500U
ELECTRONIC CONTROL	Lishui 36v 6A – 12A
RIMS	16"x1.75", balck alloy
PEDAL SENSOR	sensor PAS V12, 6 assistency levells
CHARGER	ST Charger 42.0V 2.0A EU conector
TYRES	CST 16x1.75" 47-305
FRONT BRAKE	PROMAX Alloy tipo V, silver
REAR BRAKE	PROMAX Alloy tipo V, silver
FRONT LIGHT	White, USB
REAR LIGHT	Red, USB
CHAINWHEEL	52T 165mm
BRAKE LEVERS	Promax with electrical cut-off sensor
PEDALS	Wellgo F284, PP 9/16" folded with reflector
GEARS	Single Speed 14T
HANDLES	Ergonomics
REAR DERAILLEUR LEVERS	N/A
HANDLEBARS	22.2x560mm, plata, alloy folded
SADDLE	Velo VL-6309A
STEM	Optional
RACK	Yes, with rolling wheels
BELL	Optional
TRANSPORT BAG	Optional

SPECIFICATIONS

WEIGHT (KG)	17
DIMENSIONS (CM)	130x106x57
FOLDING TIME (S)	10
FOLDED DIMENSIONS (CM)	62x33x65
HANDLEBAR HEIGHT (CM)	106(max)
SADDLE HEIGHT (CM)	110(max)
MAX LOAD (KG)	110
MAX HEIGHT (M)	1.85
RANGE(KM)	up to 50km
RECHARGING TIME (H)	4
VOLTAGE (V)	100-240 VAC
MAX SPEED (KM/H)	25
BATTERY LIFE (CYCLES)	800
MAXIMUM SLOPE (%)	15%
TYRE PRESSURE	3.1 bar 45 PSI
CERTIFICATION	CE, EN15194 – bicycles EPAC
PACKAGE DIMENSIONS (CM)	95x73x28cm